

# ENVIRONMENTAL PRODUCT DECLARATION

as per ISO 14025 and EN 15804+A2

Owner of the Declaration	Wildeboer Bauteile GmbH
Publisher	Institut Bauen und Umwelt e.V. (IBU)
Programme holder	Institut Bauen und Umwelt e.V. (IBU)
Declaration number	EPD-WIL-20230373-ICA1-EN
Issue date	02.01.2024
Valid to	01.01.2029

## VKup/pro volume flow controller and DKpro pressure controller Wildeboer Bauteile GmbH

[www.ibu-epd.com](http://www.ibu-epd.com) | <https://epd-online.com>



ECO PLATFORM

EPD  
VERIFIED

## 1. General Information

### Wildeboer Bauteile GmbH

#### Programme holder

IBU – Institut Bauen und Umwelt e.V.  
Hegelplatz 1  
10117 Berlin  
Germany

#### Declaration number

EPD-WIL-20230373-ICA1-EN

#### This declaration is based on the product category rules:

Volume flow controllers and volume flow limiters for ventilation systems, 01.08.2021  
(PCR checked and approved by the SVR)

#### Issue date

02.01.2024

#### Valid to

01.01.2029



Dipl.-Ing. Hans Peters  
(Chairman of Institut Bauen und Umwelt e.V.)



Florian Pronold  
(Managing Director Institut Bauen und Umwelt e.V.)

### VKup/pro volume flow controller and DKpro pressure controller

#### Owner of the declaration

Wildeboer Bauteile GmbH  
Marker Weg 11  
26826 Weener  
Germany

#### Declared product / declared unit

1 x volume flow controller with optional accessories

#### Scope:

This document refers to the manufacture, transportation, installation, operation and disposal of the declared volume flow controllers (VKpro, 200 x 100 mm, comprising the components casing, electrical damper blade, measuring cross, drive and control components) for ventilation air conditioning systems.


It is also valid for the VKup volume flow controllers and the DKpro pressure controllers. The products are produced exclusively in Germany at the factory in Weener in which the production data from the year 2021/2022 was collected.

The owner of the declaration shall be liable for the underlying information and evidence; the IBU shall not be liable with respect to manufacturer information, life cycle assessment data and evidences.

The EPD was created according to the specifications of EN 15804+A2. In the following, the standard will be simplified as *EN 15804*.

#### Verification

The standard EN 15804 serves as the core PCR	
Independent verification of the declaration and data according to ISO 14025:2011	
<input type="checkbox"/>	internally
<input checked="" type="checkbox"/>	externally



Matthias Klingler,  
(Independent verifier)

## 2. Product

### 2.1 Product description/Product definition

**VKpro volume flow controllers** are maintenance-free electronic controllers for constant and variable volume flows in ventilation and air conditioning systems. They can be installed and operated in any mounting position in ventilation ducts for supply and exhaust air. The casing and control mechanism are made of galvanized sheet steel. The blades for volumetric flow control are centrally supported and equipped with a seal. The bearing axles are made of stainless steel and are guided in special plastic bearing bushes. The measuring cross is made of aluminium. The control components comprise a controller with integrated static or dynamic sensor and an actuator with standard, quick or spring return. The controller with integrated sensor is mounted on an attachment console which can be tilted or offset manually in confined spaces. Control and electrical connection of the VKpro volume flow controller are analogue, by MPBus, BACnet or Modbus. All control components facilitate the operation modes 'constant' and 'variably adjustable 0–10 V, 2–10 V'. Overrides, parallel operation and sequential circuits are possible. Factory settings can be ordered. Modifications by the user can be made using a setting device, including in conjunction with a PC or using the integrated NFC interface with a smartphone. The volume flow controllers allow for a high accuracy with an approximate fluctuation of only  $\pm 5\%$  to  $\pm 20\%$  of the actual volume flow. Accordingly, the flow rates are held constant in the overall pressure range of 5 Pa to 1000 Pa.

**VKup volume flow controllers** are maintenance-free electronic controllers for constant and variable volume flows in ventilation and air conditioning systems. They can be installed and operated in any mounting position in ventilation ducts for supply and exhaust air. The casing and control mechanism are made of galvanized sheet steel. The blades for volumetric flow control are centrally supported and equipped with a seal. The bearing axles are made of stainless steel and are guided in special plastic bearing bushes. The measuring cross is made of aluminium.

Four 24 VAC/DC actuators are available.

- The AN actuator works exclusively with analogue control.
- The MP actuator is suitable for analogue control using MP-Bus, and can be set using a smartphone via an NFC interface.
- The KNX actuator works exclusively in KNX bus mode.
- The MOD actuator can be activated by BACnet, Modbus, MP-Bus or is suitable for analogue control. Actuators which are suitable for analogue control can be used for the operating modes 'constant' and 'variably adjustable 0–10 V, 2–10 V'. '3-level', overrides, parallel operation and sequential circuits are also possible. Factory settings can be ordered. Modifications by the user can be made using a setting device, including in conjunction with a PC.

The volume flow controllers allow for a high accuracy with an approximate fluctuation of only  $\pm 5\%$  to  $\pm 20\%$  of the actual volume flow. Accordingly, the flow rates are held constant in the overall pressure range of 5 Pa to 1000 Pa.

**DKpro pressure controllers** are maintenance-free electronic controllers for constant and variable pressures in ventilation and air conditioning systems or corresponding rooms. They can be installed and operated in any supply and exhaust air. The casing and control mechanism are made of galvanized sheet steel. The blades for volumetric flow control are centrally supported and equipped with a seal. The bearing axles are made of stainless steel and are guided in special plastic bearing bushes. The measuring cross is made of aluminium. The measuring cross is required for the optional volume flow

measuring device which is available for retrofitting. Otherwise, the connections are closed. The control components comprise a controller with integrated static or dynamic sensor and an actuator with standard, quick or spring return. The controller with integrated sensor is mounted on an attachment console which can be tilted or offset manually in confined spaces. Control and electrical connection of the DKpro pressure controller are analogue, by MP-Bus, BACnet or Modbus. All control components facilitate the operation modes 'constant' and 'variably adjustable 0–10 V, 2–10 V'. Overrides, parallel operation and sequential circuits are possible. Constant or variable set points which can be referenced as overpressure or negative pressure are specified. The differential pressure is measured. The positioning angle of the blades is then used for pressure control. Factory settings can be ordered. Modifications by the user can be made using a setting device, including in conjunction with a PC or using the integrated NFC interface with a smartphone. DKpro pressure controllers facilitate high levels of accuracy with an approximate fluctuation of only  $\pm 5\%$  to  $\pm 10\%$  of the actual pressure. The sensor-related pressure ranges  $P_{start}$  to  $P_{nom}$  and the pressures preset for ventilation ducts or rooms are held constant within a hysteresis. The respective national regulations at the location of use, in Germany, for example, the construction ordinances of the federal states and the technical rules based on these regulations, apply for use of the product.

### 2.2 Application

Volume flow controllers for controlling constant and variable volume flows in ventilation and air conditioning systems and for shutting off ventilation ducts. Pressure controllers for controlling constant and variable pressures in ventilation and air conditioning systems and for shutting off ventilation ducts. Control can be performed using room and duct pressure.

### 2.3 Technical Data

The requirements according to the harmonised regulations for CE marking, for electromagnetic compatibility (EMC) in accordance with EU Directive 2014/30/EU and the requirements for performance rating according to DIN EN 12589:2002-01, Ventilation for buildings - Air terminal units - Aerodynamic testing and rating of constant and variable rate terminal units and the associated requirements according to ISO 5135, ISO 3741, ISO 5167-1 and EN 1751 are met.

#### Construction data

The following data relates to the VKpro electronic volume flow controller based on assessment of a worst case. The **manufacturer's documents** include further data, including on the VKup volume flow controller and the DKpro pressure controller.

Name	Value	Unit
Supply voltage	24	V
Maximum static pressure drop	5-1000	Pa
Permissible flow velocity	12	m/s
Volume flow range	144-36000	m <sup>3</sup> /h
Control voltage	0-10	V
Control voltage	2-10	V
Runtime for 90 ° rotation of the damper blade approx.	90	s
Connected load at rest	0.5	W
Power consumption when running	1.5	W
Leak tightness class of the casing according to EN 1751	C	-
Runtime for rotation (OPEN/CLOSED)	-	s
Leak tightness class of the damper blade according to EN 1751	4	-
Degree of protection IP	42-54	-
Casing shape (circular/rectangular)	Rectangular	-

## 2.4 Delivery status

The following size variants are available: VKup/VKpro/DKpro from (W x H) 200 mm x 100 mm to 1000 mm x 1000 mm. Depending on the product, various drives can be selected, acoustic insulation shells are optional accessories. For high and continuous control accuracy, each volume flow controller and pressure controller is factory adjusted.

## 2.5 Base materials/Ancillary materials

Percent by weight, all specifications are approximate specifications

VKpro - casing, damper blade, measuring cross (without drive)  
Steel, galvanized: 93 %  
Steel, black: < 1 % Plastic: 2 %  
Stainless steel: 4 % Brass: < 1 %

VKpro - drive Steel: 49 %  
Plastic: 40 %  
Electronic components (circuit boards etc.): 3 % Copper: 7 %  
Brass: 2 %

VKpro - controller Steel: 49 %  
Plastic: 40 %  
Electronic components (circuit boards etc.): 3 % Copper: 7 %  
Brass: 2 %

VKup - casing, damper blade, measuring cross (without drive)  
Steel, galvanized: 94 %  
Steel, black: < 1 % Plastic: 1 %  
Stainless steel: 5 % Brass: < 1 %

VKup - drive Steel: 49 %  
Plastic: 40 %  
Electronic components (circuit boards etc.): 3 % Copper: 7 %  
Brass: 2 %

DKpro - casing, damper blade, measuring cross (without drive)  
Steel, galvanized: 93 % Steel, black: < 1 % Plastic: 2 %  
Stainless steel: 4 % Brass: < 1 %

DKpro - drive Steel: 49 %  
Plastic: 40 %  
Electronic components (circuit boards etc.): 3 % Copper: 7 %  
Brass: 2 %

DKpro - controller Steel: 49 %

Plastic: 40 %

Electronic components (circuit boards etc.): 3 % Copper: 7 %  
Brass: 2 %


The product contains substances on the ECHA list of the substances of very high concern (SVHC) for approval (date 08/07/2021) above 0.1 wt. %: no.

The product contains further CMR substances of category 1A or 1B which are not on the candidate list above 0.1 wt. % in at least one subassembly: no.

Biocidal products were added to the construction product in question or it has been treated with biocidal products (it is thus classed as treated goods in accordance with the Biocidal Products Regulation (EU) no. 528/2012): no.

## 2.6 Manufacture

Production is performed at a single location in the factory in Weener. The necessary raw parts and semi-finished parts as well as auxiliary and operating materials are supplied by suppliers and enter into production. The production of semi-finished parts is performed in pre-fabrication with conventional production methods. Metal parts are punched and edged to shape. Cuts are optimised accordingly to prevent waste. Waste which is then still produced is collected and, wherever possible, recycled by appropriate companies, or disposed of as domestic waste and incinerated. Lubricants are collected, treated and re-used in production as far as possible. Dusts and fumes are extracted and collected on-site. The parts from pre-fabrication are assembled in final assembly together with purchased parts to form the volume flow controllers, checked within the scope of quality assurance according to ISO 9001, packaged and dispatched. For high and continuous control accuracy, each volume flow controller is factory adjusted. Operation is subject to an energy management system.

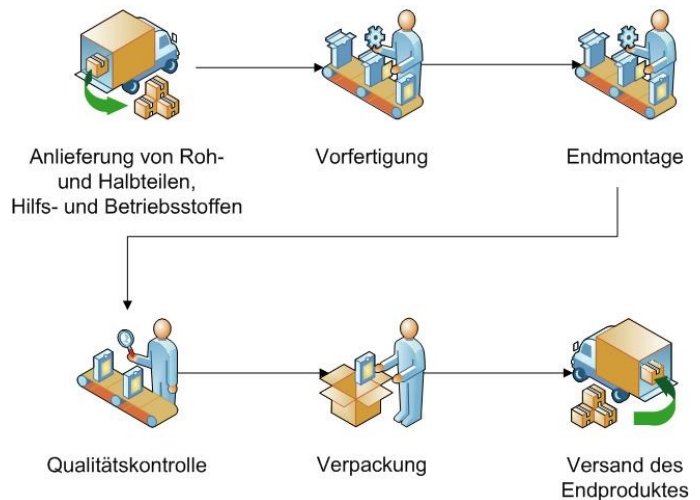

## 2.7 Environment and health during manufacturing

At no time during the entire manufacturing process are occupational health and safety measures going beyond those stipulated by law required. Waste is prevented as far as possible using optimised cuts, lubricants are re-used using recycling measures.

## 2.8 Product processing/Installation

The *manufacturer's documents*, such as manuals, installation regulations and operating instructions provided by **Wildeboer Bauteile GmbH** must be adhered to. Moreover, the safety and processing regulations, for example for ventilation systems engineering or electrical work, and the legal occupational health and safety regulations must be observed.



## 2.9 Packaging

The products are transported on reusable pallets and packaged in polyethylene (PE) films. Alternatively, transportation can be performed in boxes made of recycled paper. Disposal, with the exception of the pallets, is performed by the local recycling companies. Pallets are re-used on an exchange basis.

Only the genuinely necessary amount of packaging material is used, and packaging is performed in an optimised manner. A table with a list of quantities of packaging materials can be found in chapter 4.

## 2.10 Condition of use

The material composition does not change during use. Unusual effects, for example, air with extremely high salt levels or chemical effects, which can cause changes, are the exception.

## 2.11 Environment and health during use

During use, no negative effects on the environment or health are to be expected. Given that the product is maintenance-free, lubrication is not necessary during use. There are no deposits of soiling due to the design. A hygiene certificate is available (see chapter 7).

## 2.12 Reference service life

The duration of functionality of volume flow controllers depends on the respective design, the materials used and the ambient conditions. If used properly, the average reference service life is 20 years.

Description of the influences on the ageing of the product when applied in accordance with the rules of technology.

## 2.13 Extraordinary effects

### Fire

Not relevant.

### Water

Nicht relevant.

## Mechanical destruction

Not relevant.

## 2.14 Re-use phase

After using volume flow controllers, they can be removed and, in theory, re-used. As a result of the composition of the volume flow controllers, recycling is possible for the metal and electronic components. The other components (e.g. plastics) can be used for thermal recycling.

## 2.15 Disposal

Disposal can be classified in accordance with the codes of the European List of Wastes Regulation according to the Ordinance on the List of Wastes (AVV): Steel (17 04 05), insulation material (17 06 04), plastic (17 02 03), electrics (20 01 36).

## 2.16 Further information

[www.wildeboer.de](http://www.wildeboer.de)

## 3. LCA: Calculation rules

### 3.1 Declared Unit

The declaration refers to the manufacture of one VKpro volume flow controller (dimensions 200 x 100 mm (W x H)), including drive and electrical control unit. The declaration also applies to the DKpro pressure controller with the same dimensions. LCA scenarios and results tables for the VKup volume flow controller are listed in the public annex of the EPD.

#### Declared unit VKpro

Name	Value	Unit
Declared unit	1	pce.
Mass reference	5.85	kg/pce

Other declared units are allowed if the conversion is shown transparently.

### 3.2 System boundary

The system boundary of the EPD of the type "from the cradle to the grave" follows the modular structure in accordance with EN 15804. The eco-balance of the assessed products takes into account modules A, B, C and D:

#### Product stage (A1–A3):

Provision of raw materials and transportation by truck of the raw materials to the factory. Production expenses including packaging material. Treatment of non-metallic production waste. Metallic production waste reaches the end of the waste characteristic immediately after creation, and is exported according to module D.

#### Construction stage (A4–A5):

Module A4: Transportation by truck to the construction site (100 km). The transportation distance can be adjusted at building level as necessary (e.g. in case of actual transportation distance of 200 km: multiplication of the eco-balance values by a factor of 2).

Module A5: Treatment of packaging. Resultant credits in module D as necessary. Power consumption for installation (use of hand-held power tools as necessary) was not taken into account

#### Use stage (B1–B5):

No emissions are released during use of the product (B1). Servicing (B2) and repair (B3) or the replacement of individual components (B4) is not relevant during the assessed life span (maintenance-free). According to manufacturer information, the product does not need to be restored during the life span (B5). Modules B1 to B5 are therefore declared with a '0'.

#### Use stage – operation of the building (B6–B7):

The required electrical energy for operation of the product with electric drive motor and the electrical energy for set point adjustments.

#### Disposal stage (C1–C4):

Module C1: Manual demolition (unencumbered).

Module C2: Transportation by truck for waste treatment (50 km). The transportation distance can be adjusted at building level as necessary (e.g. in case of actual transportation distance of 100 km: multiplication of the eco-balance values by a factor of 2). The end-of-waste status of motors is achieved after processing, i.e. separation of the material fractions contained. The expenses for processing were neglected in the product life cycle.

Module C3: Thermal treatment of raw materials with calorific value.

Module C4: Disposal of raw materials without calorific value.

#### Credits and debits outside the system boundaries (D):

Debits and credits from material recycling of metals (including processing) and credits for substituted thermal energy and power which have been exported from modules A1–A3, A5 and C3.

### 3.3 Estimates and assumptions

One supplier of an individual component declared "other plastics" in a manufacturer data sheet. These quantities were modelled as PBT.

### 3.4 Cut-off criteria

All the data from the capture of operating data, i.e. all raw materials used according to the recipe, and the power and water requirement were taken into account in the balance. The transportation expenses were taken into account for all assessed inputs with the exception of packaging materials. The end-of-waste status of motors is achieved after processing, i.e. separation of the material fractions contained. The expenses for processing were neglected in the product life cycle. Therefore, in accordance with PCR part A, material and energy flows with a percentage of < 1 % were also taken into account.

### 3.5 Background data

For the calculation of the eco-balance, Sphera MLC databases (formerly "GaBi") of version CUP 2022.2 were used.

### 3.6 Data quality

The data quality can be regarded as high. The manufacture of the products was modelled with primary data from Wildeboer Bauteile GmbH.

The respective background datasets were available in the

Sphera MLC database (formerly "GaBi") for all relevant used primary products. The most recent version of the data used dates back a maximum of 5 years.

### 3.7 Period under review

The data capture for the volume flow controllers was performed at Wildeboer Bauteile GmbH, at the Weener (Germany) location, for the period 2021/2022.

### 3.8 Geographic Representativeness

Land or region, in which the declared product system is manufactured, used or handled at the end of the product's lifespan: Germany

### 3.9 Allocation

No coproducts or by-products are generated during production. Therefore, no allocation was used.

### 3.10 Comparability

Basically, a comparison or an evaluation of EPD data is only possible if all the data sets to be compared were created according to EN 15804 and the building context, respectively the product-specific characteristics of performance, are taken into account.

## 4. LCA: Scenarios and additional technical information

### Characteristic product properties of biogenic carbon

#### Information on the description of the content of biogenic carbon at the factory gate

The product does not contain any bio-based raw materials, the content of biogenic carbon thus amounts to 0 kg.

Name	Value	Unit
Biogenic carbon in the product	-	kg C
Biogenic carbon in the corresponding packaging	0.23	

Note: 1 kg of biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>.

The following technical information is the basis for the declared modules or can be used for the development of specific scenarios in the context of a building evaluation if modules are not declared (MND).

The eco-balance results of variants of the declared product or products with varying dimensions can be provided by *Wildeboer Bauteile GmbH* on request.

The declared products are maintenance-free. Therefore, no scenario specifications are made for modules B1–B5.

#### Transportation to the construction site (A4)

Name	Value	Unit
Utilisation (including unladen journeys)	61	%
Transportation distance	100	km

#### Installation in the building (A5)

The quantities listed in the following table represent the packaging materials used.

Name	Value	Unit
Output materials as a result of waste treatment at the construction site (sum of packaging materials)	0.57	kg
Cardboard packaging	0.04	kg
PE film	0.01	kg
Wooden pallet	0.52	kg

#### Reference service life

Name	Value	Unit
Service life according to manufacturer information	20	a

#### Operational energy (B6) VKpro

Name	Value	Unit
Power consumption of drive at rest	0.5	W
Operation time, at rest	8723.5	h / year
Power consumption of drive when running	2.0	W
Operating time, running	36.5	h / year
Power consump. of controller (continuous power 0.3 W)	2.64	kWh / year
Total power consumption	7.08	kWh / year

The environmental impacts due to use of energy during the service life (module B6) are specified in relation to a year, and, if necessary, must be multiplied by the scheduled service life (in years) at building level.

#### End of the life span (C1–C4) VKpro

<b>Name</b>	<b>Value</b>	<b>Unit</b>
Collected separately, waste type	5.85	kg
For recycling	5.37	kg
For energy reclamation	0.48	kg
For waste disposal	-	kg

## 5. LCA: Results

The following shows the results of the indicators concerning the estimated impact, of the use of resources and waste and other output flows based on a single VKpro volume flow controller [5.85 kg/pc.]. The results tables also apply to the DKpro pressure controller with the same dimensions. Results tables for the VKup volume flow controller can be viewed in the public annex of the EPD.

**DESCRIPTION OF THE SYSTEM BOUNDARY (X = INCLUDED IN LCA; MND = MODULE OR INDICATOR NOT DECLARED; MNR = MODULE NOT RELEVANT)**

Product stage			Construction process stage		Use stage								End of life stage				Benefits and loads beyond the system boundaries
Raw material supply	Transport	Manufacturing	Transport from the gate to the site	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential	
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	

### RESULTS OF THE LCA - ENVIRONMENTAL IMPACT according to EN 15804+A2: 1 x VKpro volume flow controller (100 mm x 200 mm) with 5.85 kg/piece

Parameter	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> eq	2.39E+01	3.53E-02	8.98E-01	0	0	0	0	0	2.92E+00	0	0	1.78E-02	9.68E-01	0	-1.24E+01
GWP-fossil	kg CO <sub>2</sub> eq	2.46E+01	3.48E-02	5.66E-02	0	0	0	0	0	2.92E+00	0	0	1.75E-02	9.68E-01	0	-1.24E+01
GWP-biogenic	kg CO <sub>2</sub> eq	-7.88E-01	3.9E-04	8.41E-01	0	0	0	0	0	1.72E-03	0	0	1.63E-04	8.48E-05	0	1.5E-02
GWP-luluc	kg CO <sub>2</sub> eq	8.78E-03	1.31E-04	1.66E-06	0	0	0	0	0	1.9E-04	0	0	9.82E-05	3.16E-06	0	-4.2E-03
ODP	kg CFC11 eq	2.41E-10	5.01E-15	6.56E-14	0	0	0	0	0	2.89E-11	0	0	1.05E-15	9.82E-14	0	2.17E-11
AP	mol H <sup>+</sup> eq	9.16E-02	3.02E-05	1.25E-04	0	0	0	0	0	4.29E-03	0	0	1.68E-05	8.47E-04	0	-4.04E-02
EP-freshwater	kg P eq	3.18E-05	7.25E-08	1.57E-08	0	0	0	0	0	1.31E-06	0	0	5.26E-08	3.03E-08	0	-3.77E-06
EP-marine	kg N eq	1.69E-02	9.62E-06	4.02E-05	0	0	0	0	0	1.17E-03	0	0	5.22E-06	4.23E-04	0	-7.09E-03
EP-terrestrial	mol N eq	1.81E-01	1.16E-04	5.92E-04	0	0	0	0	0	1.25E-02	0	0	6.27E-05	4.76E-03	0	-7.68E-02
POCP	kg NMVOC eq	5.34E-02	2.61E-05	1.09E-04	0	0	0	0	0	3.31E-03	0	0	1.46E-05	1.08E-03	0	-2.35E-02
ADPE	kg Sb eq	1.01E-03	3.62E-09	1.6E-09	0	0	0	0	0	3.48E-07	0	0	1.47E-09	2.69E-09	0	-1.99E-04
ADPF	MJ	2.86E+02	4.66E-01	1.81E-01	0	0	0	0	0	6.2E+01	0	0	2.35E-01	3.42E-01	0	-1.05E+02
WDP	m <sup>3</sup> world eq deprived	4.02E+00	1.38E-04	9.21E-02	0	0	0	0	0	2.18E-01	0	0	1.58E-04	1.05E-01	0	-3.5E-01

GWP = Global warming potential; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential of land and water; EP = Eutrophication potential; POCP = Formation potential of tropospheric ozone photochemical oxidants; ADPE = Abiotic depletion potential for non-fossil resources; ADPF = Abiotic depletion potential for fossil resources; WDP = Water (user) deprivation potential)

### RESULTS OF THE LCA - INDICATORS TO DESCRIBE RESOURCE USE according to EN 15804+A2: 1 x VKpro volume flow controller (100 mm x 200 mm) with 5.85 kg/piece

Parameter	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PERE	MJ	4.41E+01	2.77E-02	8.49E+00	0	0	0	0	0	8.95E+00	0	0	1.34E-02	5.82E-02	0	1.9E+00
PERM	MJ	8.45E+00	0	-8.45E+00	0	0	0	0	0	0	0	0	0	0	0	0
PERT	MJ	5.25E+01	2.77E-02	4.2E-02	0	0	0	0	0	8.95E+00	0	0	1.34E-02	5.82E-02	0	1.9E+00
PENRE	MJ	2.73E+02	4.67E-01	8.34E-01	0	0	0	0	0	6.2E+01	0	0	2.36E-01	1.37E+01	0	-1.06E+02
PENRM	MJ	1.4E+01	0	-6.53E-01	0	0	0	0	0	0	0	0	0	-1.34E+01	0	0
PENRT	MJ	2.87E+02	4.67E-01	1.81E-01	0	0	0	0	0	6.2E+01	0	0	2.36E-01	3.43E-01	0	-1.06E+02
SM	kg	1.35E+00	0	0	0	0	0	0	0	0	0	0	0	0	0	5.41E+00
RSF	MJ	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
FW	m <sup>3</sup>	1.17E-01	2.42E-05	2.17E-03	0	0	0	0	0	1.36E-02	0	0	1.51E-05	2.48E-03	0	-3.03E-02

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy resources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water



## RESULTS OF THE LCA – WASTE CATEGORIES AND OUTPUT FLOWS according to EN 15804+A2:

1 x VKpro volume flow controller (100 mm x 200 mm) with 5.85 kg/piece

Parameter	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
HWD	kg	1.56E-06	2.16E-12	1.75E-11	0	0	0	0	0	4.43E-09	0	0	1.13E-12	4.9E-11	0	3.4E-09
NHWD	kg	8.59E-01	7.39E-05	6.28E-03	0	0	0	0	0	1.32E-02	0	0	3.38E-05	2.11E-02	0	-4.9E-01
RWD	kg	5.81E-03	4.7E-07	1.07E-05	0	0	0	0	0	1.03E-02	0	0	2.91E-07	1.28E-05	0	-1.84E-04
CRU	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
MFR	kg	1.39E+00	0	0	0	0	0	0	0	0	0	0	0	5.37E+00	0	0
MER	kg	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
EEE	MJ	0	0	1.32E+00	0	0	0	0	0	0	0	0	0	1.72E+00	0	0
EET	MJ	0	0	2.37E+00	0	0	0	0	0	0	0	0	0	3.09E+00	0	0

HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed; CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy

## RESULTS OF THE LCA – additional impact categories according to EN 15804+A2-optional:

1 x VKpro volume flow controller (100 mm x 200 mm) with 5.85 kg/piece

Parameter	Unit	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
PM	Disease incidence	1.15E-06	1.88E-10	6.16E-10	0	0	0	0	0	3.83E-08	0	0	1.01E-10	2.57E-09	0	-5.06E-07
IR	kBq U235 eq	7.19E-01	4.57E-05	1.76E-03	0	0	0	0	0	1.51E+00	0	0	4.26E-05	2.01E-03	0	-1.37E-01
ETP-fw	CTUe	9.81E+01	3.7E-01	8E-02	0	0	0	0	0	1.9E+01	0	0	1.63E-01	1.28E-01	0	-2.58E+01
HTP-c	CTUh	4.29E-07	7.34E-12	5.57E-12	0	0	0	0	0	3.49E-10	0	0	3.29E-12	8.21E-12	0	-1.79E-08
HTP-nc	CTUh	4.99E-07	3.65E-10	1.94E-10	0	0	0	0	0	1.78E-08	0	0	1.7E-10	4.34E-10	0	-8.92E-08
SQP	SQP	1.48E+02	1.47E-01	5.37E-02	0	0	0	0	0	5.69E+00	0	0	8.1E-02	6.71E-02	0	-8.32E-03

PM = Potential incidence of disease due to PM emissions; IR = Potential Human exposure efficiency relative to U235; ETP-fw = Potential comparative Toxic Unit for ecosystems; HTP-c = Potential comparative Toxic Unit for humans (cancerogenic); HTP-nc = Potential comparative Toxic Unit for humans (not cancerogenic); SQP = Potential soil quality index

Disclaimer 1 – for the indicator “Potential Human exposure efficiency relative to U235”. This impact category deals mainly with the eventual impact of low-dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure or radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, radon and from some construction materials is also not measured by this indicator.

Disclaimer 2 – for the indicators “abiotic depletion potential for non-fossil resources”, “abiotic depletion potential for fossil resources”, “water (user) deprivation potential, deprivation-weighted water consumption”, “potential comparative toxic unit for ecosystems”, “potential comparative toxic unit for humans – cancerogenic”, “Potential comparative toxic unit for humans - not cancerogenic”, “potential soil quality index”. The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high as there is limited experience with the indicator.

## 6. LCA: Interpretation

The most important stages of the life cycle from an environmental point of view are the stages of manufacture and use.

In relation to the manufacturing stage, the two upstream chain processes of control electronics (circuit board) and the galvanized sheet steel dominate above all environmental indicators. These two materials together have an influence of at least 70 % on the individual indicator results. The influence of these two materials is to be classified as relevant to significant in most indicators.

The stainless steel and the plastics PA6 and PBT used have a

low to certain influence for most indicators. All other processes and materials show a low to negligible relevance for the product system.

When assessing a typical service life of 20 years, the environmental impacts identified in relation to one piece and year for operation (energy consumption) of the products add up accordingly. The associated environmental impacts as a result of this energy consumption are accordingly significant for a series of indicators, for example the global warming potential (GWP total).

## 7. Requisite evidence

### 7.1 Hygiene

In accordance with assessment no. W-329810k-20-AB, assessment no. W-329809k-20-AB and assessment no. W-329811k-20-AB, a certificate of hygiene conformity inspection for VKup, a certificate of hygiene conformity inspection for VKpro and a certificate of hygiene conformity inspection for DKpro are available. The hygienic requirements according to

VDI 6022-1, VDI 3803-1, DIN 1946-4, DIN EN 16798-3, SWKI VA105-01, SWKI VA104-0, ÖNORM H 6020 and ÖNORM H 6021 are met.

This includes certification of metabolic potential, i.e. of damage to materials as a result of microorganisms, and of resistance to cleaning agents and disinfectant during typical use.

## 8. References

### Standards

### EN 15804

EN 15804:2012+A2:2019+AC:2021, Sustainability of

construction works - Environmental product declarations - Core rules for the product category of construction products.

#### **ISO 14025**

EN ISO 14025:2011, Environmental labels and declarations - Type III environmental declarations - Principles and procedures.

#### **Further literature**

#### **IBU 2021**

Institut Bauen und Umwelt e.V.: General instructions for the EPD programme of Institut Bauen und Umwelt e.V., version 2.0, Berlin: Institut Bauen und Umwelt e.V., 2021 <http://www.ibu-epd.com>

#### **Further standards**

#### **EN 1751**

DIN EN 1751:2014-06, Ventilation for buildings - Air terminal devices - Aerodynamic testing of dampers and valves.

#### **DIN 1946**

DIN 1946-4: 2018-09, Ventilation and air conditioning, Ventilation in hospitals.

#### **ISO 3741**

DIN EN ISO 3741: 2011-01, Acoustics - Determination of sound power levels and sound energy levels of noise sources using sound pressure - Precision methods for reverberation test rooms.

#### **ISO 5135**

DIN EN ISO 5135: 2020-12, Acoustics - Determination of sound power levels of noise from air-terminal devices, air-terminal units, dampers and valves by measurement in a reverberation test room.

#### **ISO 5167-1**

DIN EN ISO 5167-1: 2022-06, Measurement of fluid flow by means of pressure differential devices inserted in circular cross-section conduits running full - Part 1: General principles and requirements.

#### **ÖNORM H 6020**

ÖNORM H 6020: 2019-06-01, Ventilation and air conditioning plants for locations for medical use - Design, construction, operation, maintenance, technical and hygiene inspections.

#### **ÖNORM H 6021**

ÖNORM H 6021: 2016-08-15, Ventilation and air conditioning plants - Specifications keeping them clean and cleaning.

#### **ISO 9001**

DIN EN ISO 9001: 2015-11, Quality management systems.

#### **EN 12589**

DIN EN 12589: 2002-01, Ventilation for buildings - Air terminal units - Aerodynamic testing and rating of constant and variable rate terminal units.

#### **EN 16798-3**

DIN EN 16798-3: 2017-11, Ventilation of non-residential buildings – Performance requirements for ventilation, air conditioning systems and room-cooling systems.

#### **Further sources**

#### **AVV**

Ordinance on the List of Wastes (AVV) of 10 December 2001 (Federal Law Gazette I page 3379) which was last amended by article 1 of the regulation of 30 June 2020 (Federal Law Gazette I page 1533).

#### **SWKI VA105-01**

SWKI VA105-01: 2015-08, Air-conditioning systems in rooms used for medical purposes (planning, implementation, qualification, operation).

#### **SWKI VA104-01**

SWKI VA104-1: 2019-01, Hygiene requirements for air conditioning systems and devices.

#### **VDI 3803-1**

VDI 3803-1: 2020-05, Air-conditioning - Structural and technical principles - Central air conditioning systems (VDI Ventilation Code of Practice).

#### **VDI 6022-1**

VDI 6022-1: 2018-01, Hygiene requirements for ventilation and air-conditioning systems and units.

#### **Spheras**

LCA software (LCA FE) and LCA database (MLC) (formerly "GaBi")  
MLC database version CUP 2022.2; Sphera Solutions GmbH:  
Software system and database for integrated balancing.  
Copyright, TM, Stuttgart, Leinfelden-Echterdingen, 1992-2022.

#### **Manufacturer's documents**

Current versions of the manufacturer's documents on the VRup/pro volume flow controller and the DKpro pressure controller, here: VKup/VKpro user manual 3.8 (2023-01)  
Operating instructions - VKup volume flow controller (2021-05)  
Operating instructions - VKpro volume flow controller (2021-05)  
DKpro user manual 3.7 (2023-04)  
Operating instructions - DKpro pressure controller (2021-05)

#### **Hygiene conformity inspection**

Certificate of hygiene conformity inspection for VKup, assessment no. W-329810k-20-AB, Hygieneinstitut des Ruhrgebietes (Ruhr District Institute of Hygiene), Gelsenkirchen  
Certificate of hygiene conformity inspection for VKpro, assessment no. W-329809k-20-AB, Hygieneinstitut des Ruhrgebietes (Ruhr District Institute of Hygiene), Gelsenkirchen  
Certificate of hygiene conformity inspection for DKpro, assessment no. W-329811k-20-AB, Hygieneinstitut des Ruhrgebietes (Ruhr District Institute of Hygiene), Gelsenkirchen

#### **ECHA**

ECHA list of the substances of very high concern relevant for approval (published in accordance with Article 59 Para. 10 of the REACH regulation): 2021-07 (expanded 2022-06).  
European Chemicals Agency (ECHA), Helsinki.

#### **2014/30/EU**

DIRECTIVE 2014/30/EU OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL, of 26 February 2014 on the harmonisation of the laws of the Member States relating to electromagnetic compatibility (recast).

#### **PCR Part A**

Product category rules for building-related products and services, Part A: Calculation rules for the eco-balance and requirements for the background report, version 1.3, Institut Bauen und Umwelt e.V., [www.ibu-epd.com](http://www.ibu-epd.com), 2022.

**PCR B: volume flow controllers, volume flow limiters and pressure controllers for ventilation systems**

Product category rules for building-related products and services. Part B: Requirements for the EPD for volume flow

controllers, volume flow limiters and for ventilation systems, version 1.0, Institut Bauen und Umwelt e.V., [www.ibu-epd.com](http://www.ibu-epd.com), 2023.



**Publisher**

Institut Bauen und Umwelt e.V.  
Hegelplatz 1  
10117 Berlin  
Germany

+49 (0)30 3087748- 0  
info@ibu-epd.com  
www.ibu-epd.com

---



**Programme holder**

Institut Bauen und Umwelt e.V.  
Hegelplatz 1  
10117 Berlin  
Germany

+49 (0)30 3087748- 0  
info@ibu-epd.com  
www.ibu-epd.com

---



**Author of the Life Cycle Assessment**

Sphera Solutions GmbH  
Hauptstraße 111- 113  
70771 Leinfelden-Echterdingen  
Germany

+49 711 341817-0  
info@sphera.com  
www.sphera.com

---



**Owner of the Declaration**

Wildeboer Bauteile GmbH  
Marker Weg 11  
26826 Weener  
Germany

04951 950 0  
info@wildeboer.de  
www.wildeboer.de